

# Matrox 4Sight EV7 >>>

Fanless industrial imaging computer



### **Overview**

### Built for the factory floor

<u>Matrox<sup>®</sup> 4Sight EV7</u> is an industrial computer built for multi-camera machine vision applications on the factory floor. Part of a long and solid history, the Matrox 4Sight EV7 is an evolution of its immediate predecessor, integrating a twelfth-generation twelve-core Intel<sup>®</sup> Core<sup>™</sup> processor that includes acceleration for deep learning inference or prediction. A fanless design with multiple ports for GigE Vision<sup>®</sup> and USB3 Vision<sup>®</sup> cameras makes the Matrox 4Sight EV7 right at home in any production facility, keeping an eye on a single line or many production lines.

Matrox 4Sight EV7 vision controllers are supported by two comprehensive software platforms: <u>Matrox Design Assistant® X</u> is a flowchartbased integrated development environment (IDE), whereas <u>Matrox</u> <u>Imaging Library (MIL) X</u> is a software development kit (SDK) for more traditional programmers. Engineers and technicians can quickly configure and deploy machine vision applications to Matrox 4Sight EV7 vision con-trollers using the range of included software tools for video capture, analysis, classification, location, measurement, reading, verification, communication, and I/O operations.

### Serve multi-camera installations with simplicity

With four 2.5 Gigabit Ethernet and four SuperSpeed USB ports, Matrox 4Sight EV7 vision controllers connect to the full range of available GigE Vision and USB3 Vision cameras. The 2.5 Gigabit Ethernet ports support PoE to further simplify cabling and thus reduce costs when opting for suitable GigE Vision cameras. Powered by a mobile-class embedded processor, Matrox 4Sight EV7 is ideal to handle typical multi-camera inspections.

### **Connect to factory and enterprise equipment**

Interfacing to other industrial equipment and communicating with enterprise systems is easy with Matrox 4Sight EV7 vision controllers. RS-232/RS-485 ports support connections to legacy automation devices, while two additional Gigabit Ethernet ports provide independent connections to industrial and enterprise networks. One of these networking ports includes a hardware-assisted mechanism for PROFINET<sup>®</sup> communication. This mechanism ensures timely response when the automation controller is set up for a short cycle-time or when the processor is too busy performing other tasks.

### Count on an industrial-strength design

Designed to reduce upkeep, the fanless Matrox 4Sight EV7 eliminates the need to clean or replace an air filter or a worn-out fan. A small footprint, rugged casing, and wide ambient operational temperature range allows the Matrox 4Sight EV7 to be mounted either horizontally or vertically in hostile, space-limited locations. Carefully selected components ensure consistent long-term availability of Matrox 4Sight EV7 vision controllers, thus maximizing return on the original investment.

### Matrox 4Sight EV7 at a glance

Reduce service stoppages with a fanless design

**Inspect multiple sites** through the support for four GigE Vision and four USB3 Vision cameras

Simplify cabling for GigE Vision installations using Power-over-Ethernet (PoE)-enabled ports

Tackle deep learning and traditional machine vision applications with a mobile-class embedded twelfth-generation Intel Core processor

**Connect separately to the factory floor and enterprise networks** via two more Gigabit Ethernet ports

Synchronize with other equipment using the integrated real-time digital I/Os with rotary encoder support and RS-232/RS-485 ports

**Streamline application development** using the <u>Matrox Design</u> <u>Assistant X</u> flowchart-based IDE or the <u>MIL X</u> SDK

Tackle machine vision applications with utmost confidence using field-proven tools for analyzing, locating, classifying, measuring, reading, and verifying

### Manage discrete I/Os in real time

A dedicated hardware-assisted mechanism on the Matrox 4Sight EV7 supports discrete I/O management, enabling output events to occur at precise moments in time, based on elapsed time, or for specific input events. An input event can come directly from a discrete input—including from a rotary encoder—or be count-derived from a discrete input. Programmed output events are stored in a hardware list, which is traversed based on a clock or an input event. Carrying out an output event results in a state transition, pulse, or pulse train on a specific discrete output. Multiple cascadable hardware timers are available to count or generate specific events. The Matrox 4Sight EV7 has what it takes to effectively synchronize a typical vision application with a manufacturing line.

## **Software Environment**

### **Microsoft Windows 10 IoT Enterprise**

Matrox 4Sight EV7 comes pre-installed with Microsoft<sup>®</sup> Windows<sup>®</sup> 10 IoT Enterprise 2021 (64-bit), which provides the familiarity, performance, and reliability of Windows 10—including the Unified Write Filter (UWF) to prevent corruptions caused by unanticipated power-downs— and multi-language support.

### Field-proven application development software

Matrox 4Sight EV7 is supported by  $\underline{MIL X}^1$  software—a comprehensive SDK with a 25-year history of reliable performance. This toolkit features interactive software and programming functions for image capture, processing, analysis, annotation, display, and archiving

#### Matrox 4Sight EV7 block diagram Up to 32 GB Digital DDR5 SO-DIMM isplayPort (DP++) \_ DisplayPort (CHANNEL A) Digital DisplayPort (DP++) DisplayPort Up to 32 GB DDR5 SO-DIMM 4800 Mbps PoE PCIe x1 GbE MAC+PHY Intel i226 (CHANNEL B) BIOS SPI GigE port SATA 3.0 x1 PCle x1 GbE MAC+PHY Intel i226 SATA (port 0) F 7 ۲ GigE port SATA 3.0 x1 PCIe x1 GbE MAC+PHY SATA (port 1) Intel i226 GigE port 12th-generation PCle x1 GbE MAC+PHY embedded PCIe Gen 4 (x2) M.2 Socket 3 Key "B" PCle x2 mobile-class Intel i226 GigE port Intel Core i5/i3 PCIe Gen 4 lanes 0 - 1 PCIe Gen 4 MUX (2 lanes) processor PCIe Gen 4 lanes 0 - 1 USB 3.2 Gen 1 (x4) M.2 Socket 3 Key "M" PCIe x4 4 ports USB 3.2 IICB 2 2 V (Type A) PCIe Gen 4 lanes 2-3 PCle x1 GbE MAC+PHY Intel i210 PCIe Gen 4 (x4) Socket 3 Key "M" PCle x4 GigE port NC-SI PCIe switch PCle x1 GbE MAC+PHY USB 2.0 (x2) NC-SI Intel i210 GigE port 2 ports USB 2.0 Audio in/out Audio codec ((( ))) PCle x1 I/O expander FPGA Terminal block LED status

## Connectivity

archiving operations, with the accuracy and robustness needed to tackle the most demanding machine vision applications. Refer to the MIL X datasheet for more information.

Matrox 4Sight EV7 is also available with, and licensed for, <u>Matrox Design</u> <u>Assistant X<sup>1</sup></u> software, a versatile and extendable IDE. Vision applications are created by constructing an intuitive flowchart instead of writing traditional programming code. A custom, web-based operator interface to the application is created through an integrated HTML visual editor. Refer to the Matrox Design Assistant X datasheet for more information.

1

RS-232/RS-485

RS-232 buffers 0 ..... 0


0 ..... 0

COM1

COM2


# Connectivity (cont.)

Matrox 4Sight EV7 front and back views

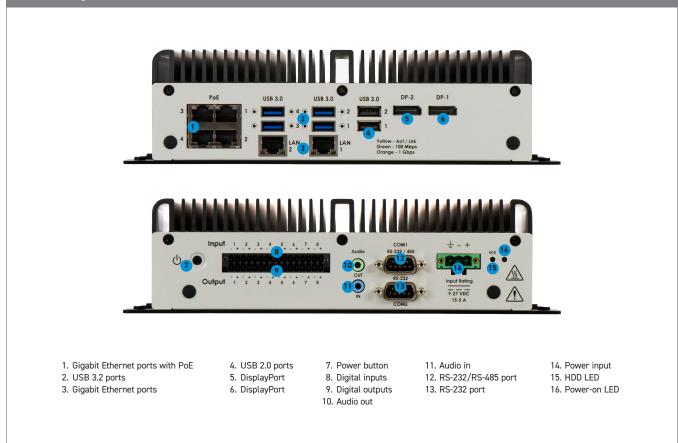

# Connectivity (cont.)



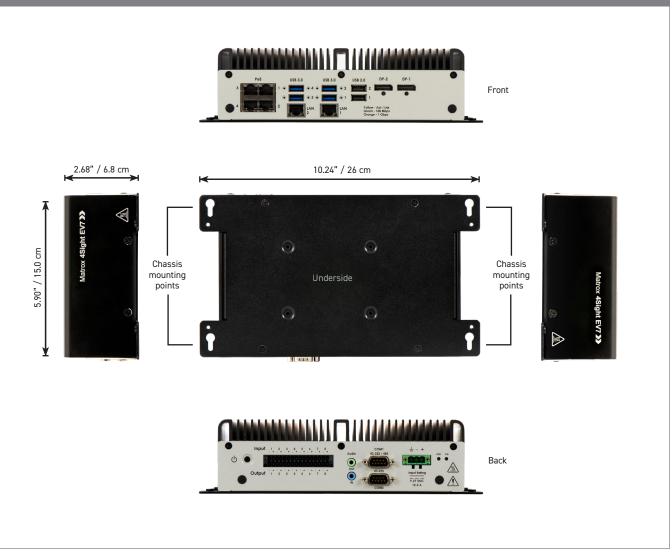

# **Specifications**

Matrox 4Sight EV7
System
Intel Core i5-1250PE / Intel Core i3-1220PE
Two (2) DDR5-4800 SODIMM slots
Dual-head graphics support
Two (2) DisplayPort Dual-Mode (DP++) outputs
Up to 4096x2304 @ 60 Hz
Six (6) Ethernet ports
Four (4) 2.5 Gigabit Ethernet ports with PoE (up to 15.4 W per port)
Two (2) standard Gigabit Ethernet ports
Four (4) USB 3.2 ports
Two (2) USB 2.0 ports
Two (2) SATA 3.0 ports (internal)
One (1) M.2 connector socket 3 Key 'M' (used by supplied 256GB MVMe M.2 2280 SSD)
One (1) M.2 connector socket 3 Key 'M' 2280
One (1) M.2 connector socket 2 Key 'B' 3052
One (1) 24-bit stereo audio input and 24-bit stereo output
One (1) RS-232 port
One (1) RS-232/RS-485 port
Sixteen (16) digital I/Os
Eight (8) inputs
Up to 24 V
Eight (8) outputs (open collector)
100 mA maximum @ 24 VDC
256 GB MVMe M.2 2280 SSD
Power input: 9-27 VDC (nominal 24 VDC @ 4.2 A)
Chassis
Dimensions (L x W x H): 22.5 x 15.0 x 6.8 cm (8.86 x 5.90 x 2.68 in)
Four (4) mounting slots
Fanless enclosure
Power switch
Power and HDD notification LEDs
Mounting
Horizontal or vertical mounting
Certifications
FCC Class A (pending)
ICES-003 Class A (pending)
CE Class A (pending)
RCM Class A (pending)
KC Class A (pending)
CSA 61010-1-12 (pending)

# Specifications (cont.)

Matrox 4Sight EV7
Environmental
Operating temperature: 0°C to 50°C (32°F to 122°F)
Storage temperature: -40°C to 85°C (-40°F to 185°F)
Relative humidity: Up to 90% (non-condensing)
Software
Pre-loaded with Microsoft Windows 10 IoT Enterprise 2021 (64-bit)
Pre-loaded with MIL X and Matrox Design Assistant X run-time environments
Optionally pre-loaded with Matrox Design Assistant X development and run-time environments

## **Ordering Information**

Part number	Description	
Hardware		
EV7I3M8	Matrox 4Sight EV7 integrated unit with Intel Core i3-1220PE, 8 GB DDR5 RAM, 256 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2021 (64-bit). Pre-loaded with MIL X and Matrox Design Assistant X run-time environments. Partially licensed for Matrox Design Assistant X and MIL X. Note: The use of this product is governed by <u>Microsoft Software License Terms</u> , among others.	
EV7I5M16	Matrox 4Sight EV7 integrated unit with Intel Core i5-1250PE, 16 GB DDR5 RAM, 256 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2021 (64-bit). Pre-loaded with MIL X and Matrox Design Assistant X run-time environments. Partially licensed for Matrox Design Assistant X and MIL X.	
	Note: The use of this product is governed by Microsoft Software License Terms, among others.	
EV7I5M16DA	Matrox 4Sight EV7 integrated unit with Intel Core i5-1250PE, 16 GB DDR5 RAM, 256 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2021 (64-bit). Pre-loaded with Matrox Design Assistant X design-time and run-time environments. Partially licensed for Matrox Design Assistant X.	
	Note: The use of this product is governed by Microsoft Software License Terms, among others.	
EV7I5M16DAP	Matrox 4Sight EV7 integrated unit with Intel Core i5-1250PE, 16 GB DDR5 RAM, 256 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2021 (64-bit). Pre-loaded with Matrox Design Assistant X design-time and run-time environments. Fully licensed for Matrox Design Assistant X and MIL X.	
	Note: The use of this product is governed by Microsoft Software License Terms, among others.	
EVPS	150 W AC/DC power adapter (100-240 VAC input/24 VDC output) for Matrox 4Sight EV7.	
Software		
Included with EV7I3M8 and EV7I5M16	Licensed for the Matrox Design Assistant X / MIL X Interface, Distributed MIL and Industrial and Robot Communications run-time packages. See Matrox Design Assistant X and MIL X datasheets for more information.	
Included with EV7I5M16DA and EV7I5M16DAP	Separate installation media with the Matrox Design Assistant X IDE and on-line documentation as well as a Matrox Design Assistant Maintenance registration number. Pre-loaded with the Matrox Design Assistant X design-time and run-time environment. Allow the Matrox Design Assistant IDE to run when it is connected to them. EV7I5M16DA is licensed for the Matrox Design Assistant X / MIL X Machine Vision, Identification, Image Compression, Interface, Distributed MIL, Metrology, Color Analysis, and Industrial and Robot Communications run-time packages. The String Reader and SureDotOCR®, Geometric Model Finder, Registration, 3D Calibration and Supplemental and Classification packages need to be licensed separately. See Matrox Design Assistant X and MIL X datasheets for more information. EV7I5M16DAP is licensed for all Matrox Design Assistant X and MIL X run-time packages.	

Endnotes: 1. The software may be protected by one or more patents; see <u>www.matrox.com/patents</u> for more information.

Matrox 4Sight EV7 | 7

### The Matrox Imaging advantage



### Assured quality & longevity

Adhering to industry best practices in all hardware manufacturing and software development, product designs pay careful attention to component selection to secure consistent long-term availability. Matrox Imaging is able to meet Copy Exact and Revision Change Control procurement requirements in particular circumstances, backed by a dedicated team of QA specialists.



### Trusted industry standards

Matrox Imaging champions industry standards in its design and production. Leveraging these standards to deliver quality compatible products, Matrox Imaging protects its customers' best interests by ensuring hardware and software components work with as many third-party products as possible.



### Comprehensive customer support

Devoted front-line support and applications teams are on call to offer timely product installation, usage, and integration assistance. Matrox Professional Services delivers deep technical assistance to help customers develop their particular applications in a timely fashion. Services include personalized training and device interfacing as well as application feasibility, prototyping, troubleshooting, and debugging.



### Tailored customer training

Matrox Vision Academy comprises online and on-premises training for Matrox Imaging vision software tools. On-premises intensive training courses are regularly held at Matrox headquarters, and can also be customized for onsite delivery. The Matrox Vision Academy online training platform hosts a comprehensive set of on-demand videos available when and where needed.



### Long-standing global network

Matrox Imaging customers benefit from a global network of distributors who offer complementary products and support, and integrators who build customized vision systems. These relationships are built on years of mutual trust and span the globe, ensuring customer access to only the best assistance in the industry.





### About Matrox Imaging

Founded in 1976, Matrox is a privately held company based in Montreal, Canada. Imaging and Video divisions provide leading component-level solutions, leveraging the others' expertise and industry relations to provide innovative, timely products.

Matrox Imaging is an established and trusted supplier to top OEMs and integrators involved in machine vision, image analysis, and medical imaging industries. The components consist of smart cameras, 3D sensors, vision controllers, I/O cards, and frame grabbers, all designed to provide optimum price-performance within a common software environment.

### Contact Matrox Imaging imaging.info@matrox.com 1 800 804 6243 (in North America) or +1 514 822 6020

www.matrox.com/imaging

The use of the terms "industrial" or "factory-floor" do not indicate compliance to any specific industrial standards.



© 2022 Matrox Electronic Systems Ltd. All rights reserved. Matrox reserves the right to change specifications without notice. Matrox and Matrox product names are either trademarks and/or registered trademarks in Canada or other countries and/or trademarks of Matrox Electronic Systems Ltd and/or Matrox Graphics Inc. All other company and product names are registered trademarks and/or trademarks of their respective owners. The information furnished herein is believed to be accurate and reliable at time of printing; however, no responsibility license is granted under any patents or patent rights of Matrox Electronic Systems Ltd.